




INSTALLATION INSTRUCTIONS*



SF2
FORD BRONCO 4 DOOR
2021-2026

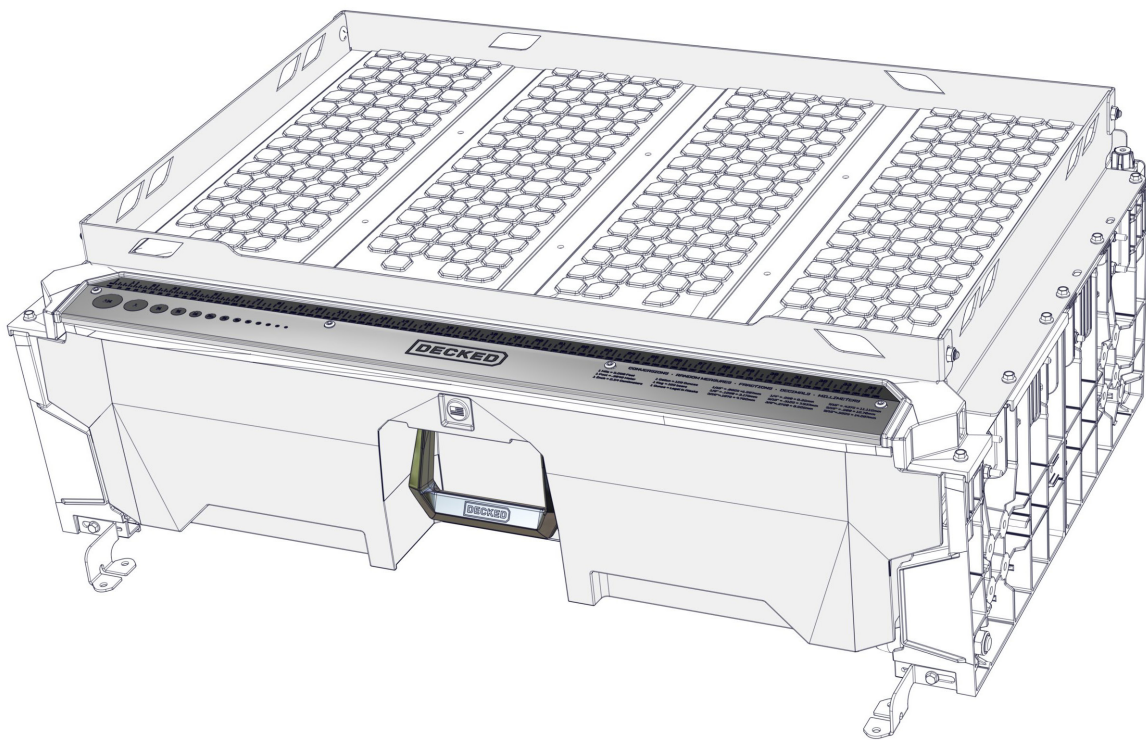

DANGER: RISK OF SERIOUS INJURY OR DEATH

Failure to follow these instructions, or any unauthorized modification/misuse of this product, can result in property damage, severe injury, or death.

Prohibited Uses & Warranty Void

No Hazardous Materials: Do NOT place fuels, flammables, explosives, or hazardous materials inside or on top of any DECKED product.

No Unauthorized Modifications: Any modification or unintended use of this product immediately voids all warranties.

Weight Limits & Payload Distribution

Distribute Loads Evenly: Concentrated weight will damage the system. All loads must be evenly distributed.

Maximum Payload Capacities:

Top Deck: 300 lbs maximum capacity

Tray: 150 lbs maximum capacity

Load Density: Approximately 50 lbs per square foot

Vehicle Limits: Always check your vehicle owner's manual for its maximum payload capacity; do not exceed vehicle limits.

Installation & Maintenance

Follow Instructions: The DECKED Drawer System must be properly installed and anchored exactly as outlined in the instructions.

Use Provided Hardware: If supplied, you must use the DECKED tie-down brackets instead of the SUV's original factory brackets.

Clear the Cargo Area: Before installation, remove any items from the vehicle's cargo area that might be blocked by the system.

Routine Inspections: Check all fasteners at least every three months and retighten any that have come loose.

Vehicle Operation & Safety

Secure the Liftgate: The vehicle's liftgate must be closed and latched whenever the vehicle is in motion.

Wear PPE: Eye protection is required during installation and maintenance.


CONTENTS

DECKED CARTON

BASE UNIT AND TRAY ASSEMBLY	1
MOUNTING BRACKETS	4
PLASTITE SCREWS	2

HARDWARE INCLUDED:


Brackets will be labeled as follows:

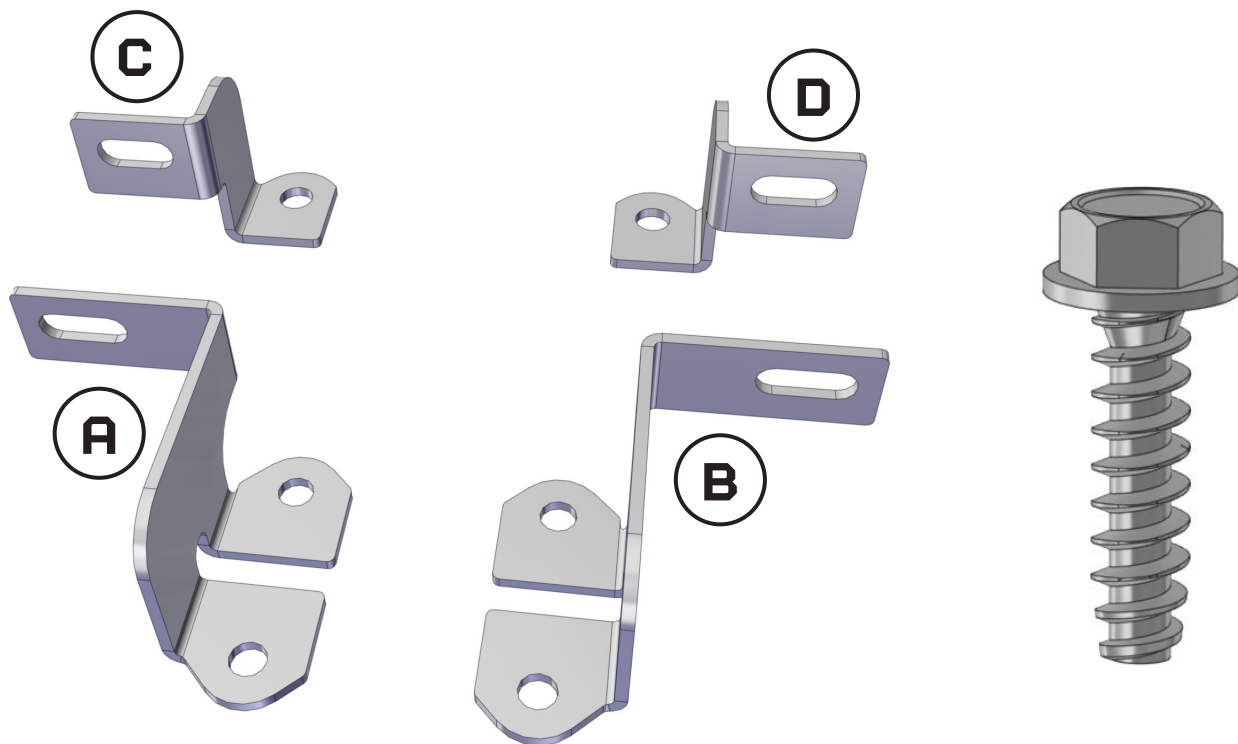

MOUNTING
BRACKETS x 4

PLASTITE SCREWS
4 will be used
2 are bagged in kit
2 are holding a temporary
shipping brace

ASSEMBLY OVERVIEW

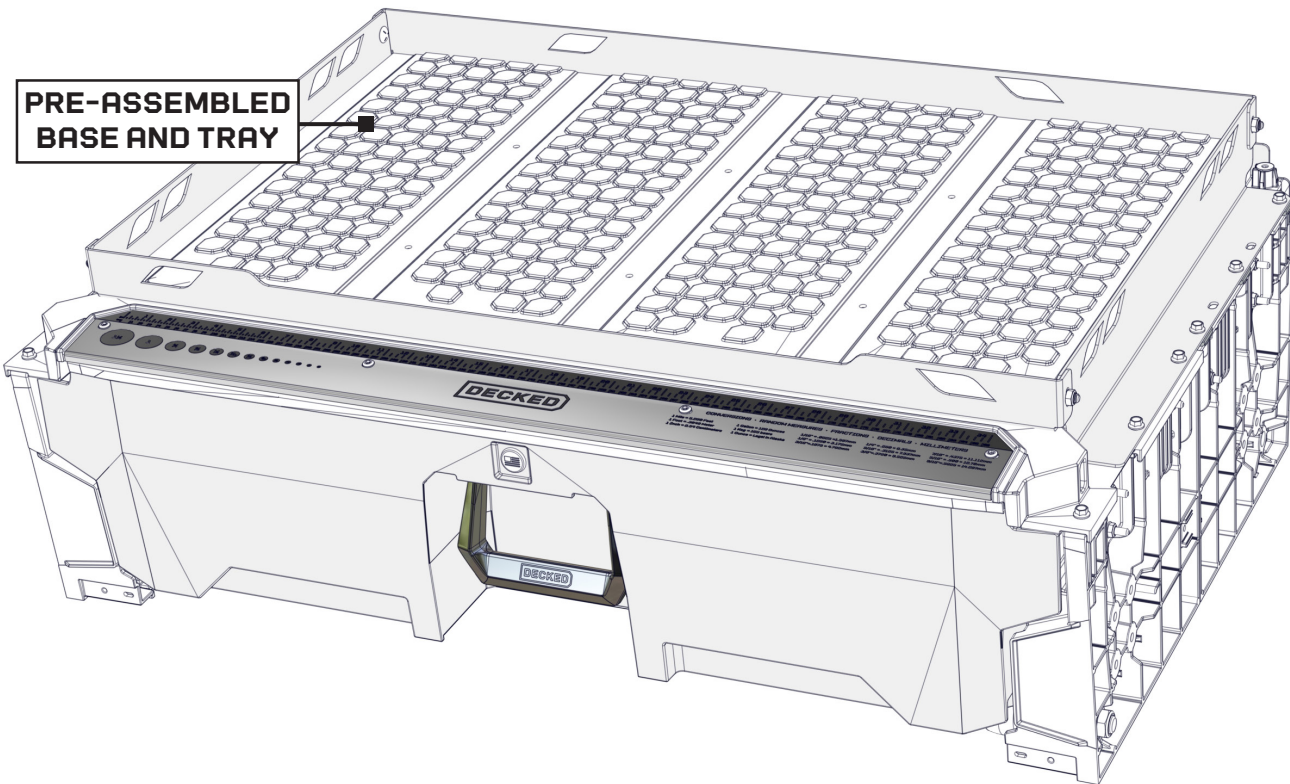


TOOLS REQUIRED


- 10 mm and 3/8" sockets and ratchet
- 2 x temporary supports (~4" sections of a 2x4 will work great)
- Torque wrench

STEP 1: PREPARE THE AREA


1. Remove any cargo from the rear cargo area.
2. Remove any additional carpeting or mats from the cargo area. The DECKED storage system must be installed to the original bare floor or carpeting only.
3. Lower the rear seats for installation.
4. Remove the covers from the four factory tie downs. Pull these up to remove. These won't be reused. DETAIL A.
5. Use a 10mm socket to remove the eight factory tie down bolts (Two in each corner). Save the bolts and washers. DETAIL B.
6. Remove the four tie down saddle brackets and rings. These won't be reused. DETAIL C.
7. REMOVE YOUR JACK AND COMPONENTS. The jack will not be accessible with the drawer system installed.

The jack is located in the rear cargo area, underneath the carpet. Lift the access panel and remove all items from this area. See DETAIL C below.

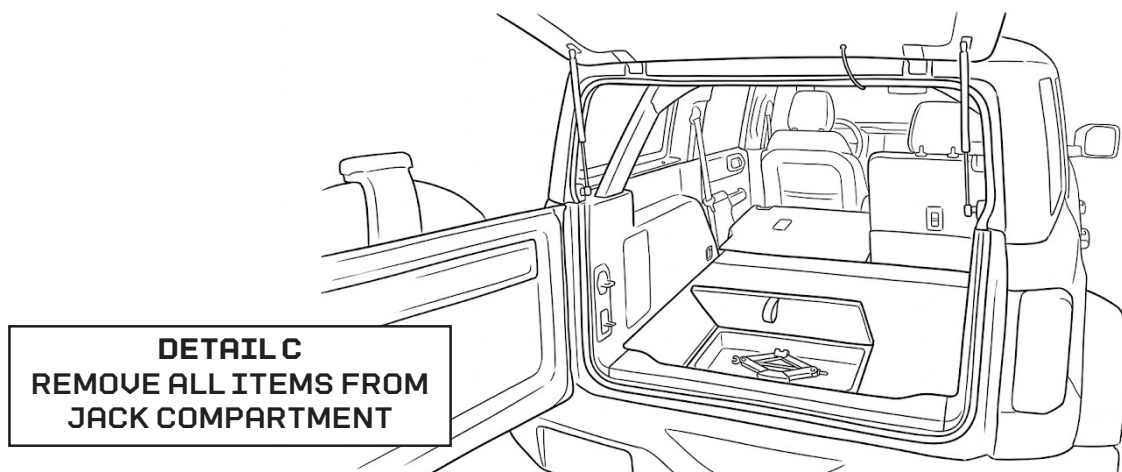


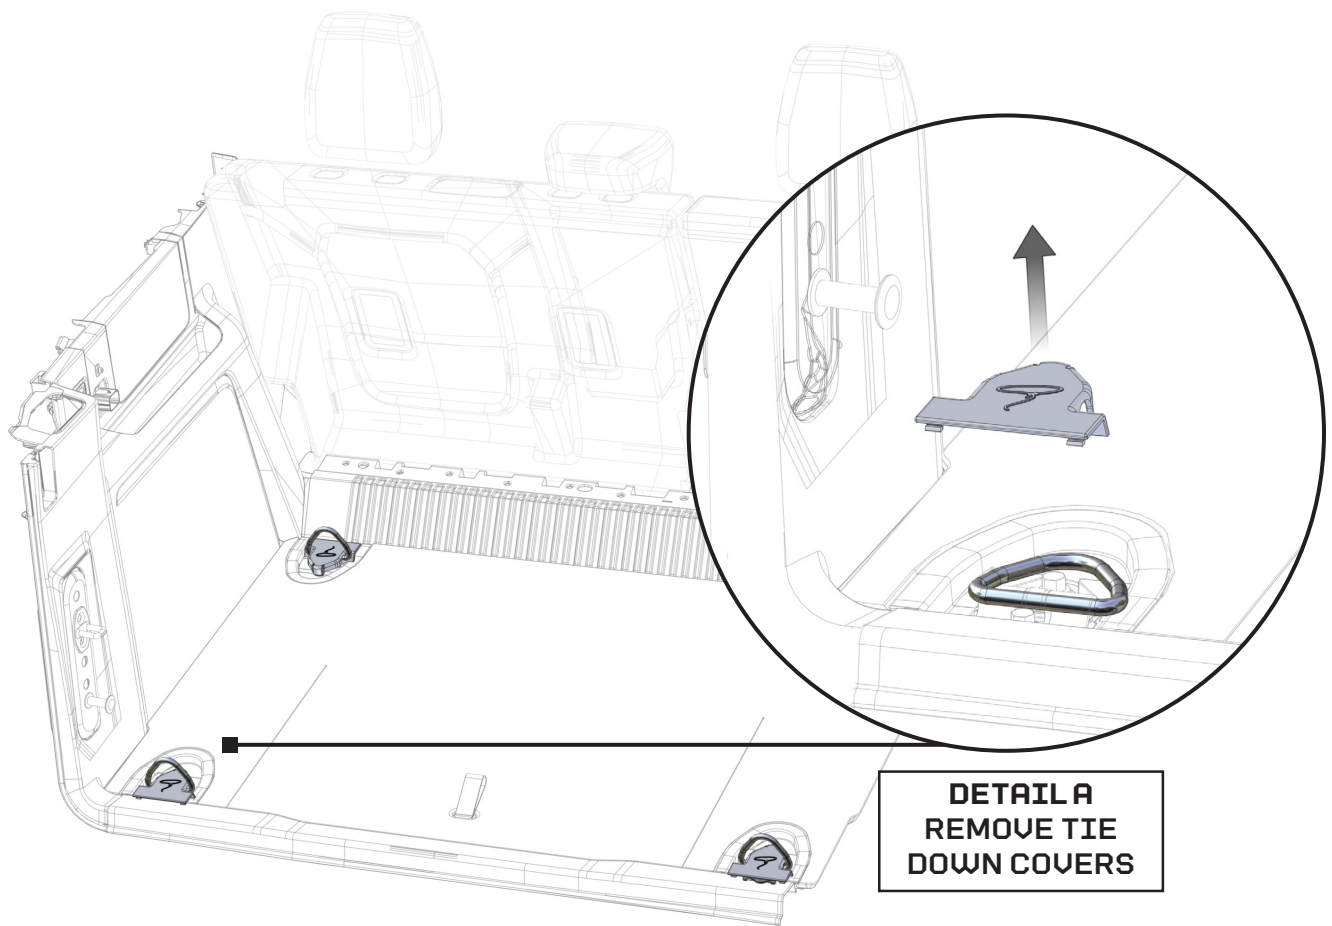

**DETAIL A
REMOVE TIE
DOWN COVERS**

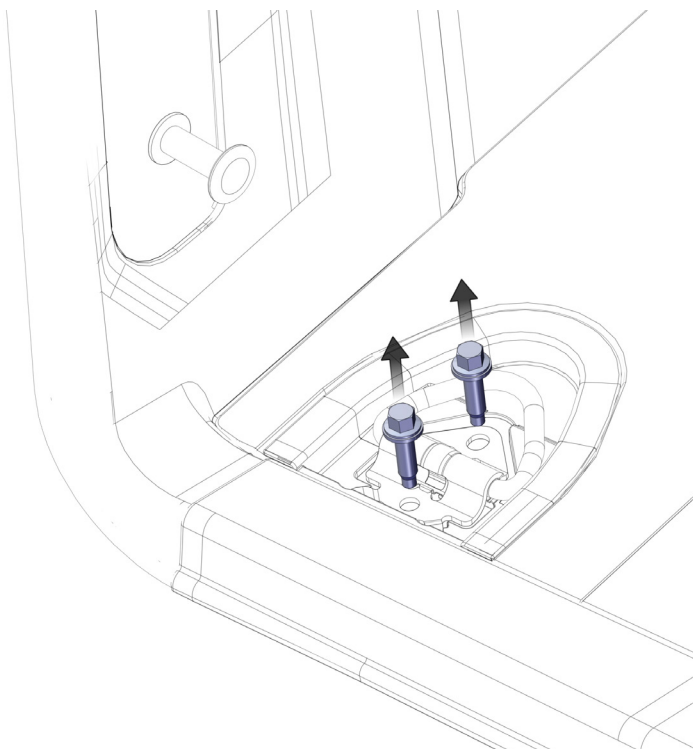

**DETAIL B
REMOVE BOLTS AND
WASHERS - SAVE**

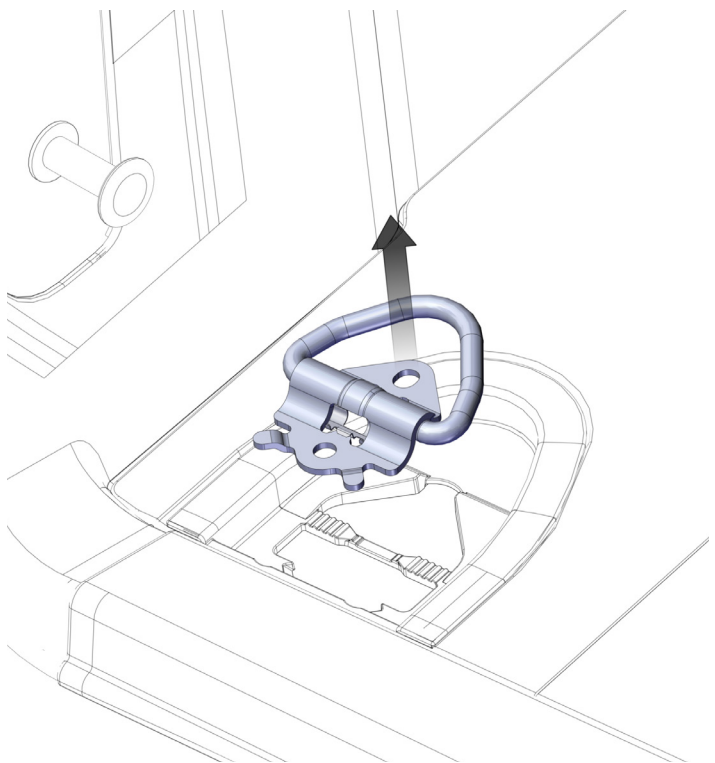




**DETAIL C
REMOVE TIE DOWN
AND BRACKETS**

STEP 2:

REMOVE TRAY

1. Remove the DECKED Storage System tray. Pull the tray out as far as it will go. Raise the bin side of the tray to clear the wheel stops and carefully lift the tray up and away from the base unit assembly.
2. Store the tray in a safe place.



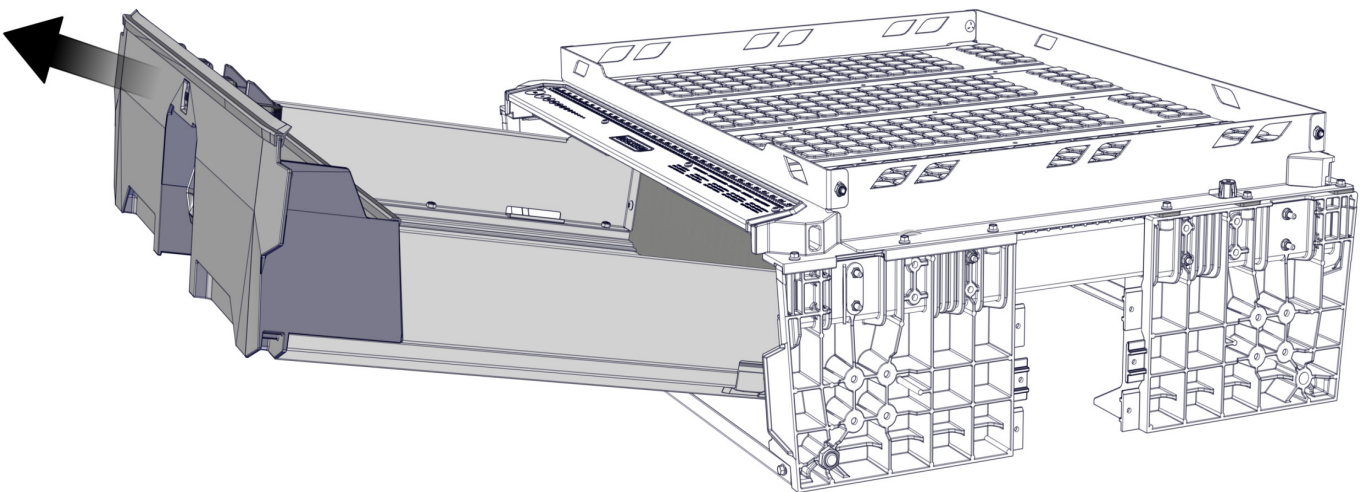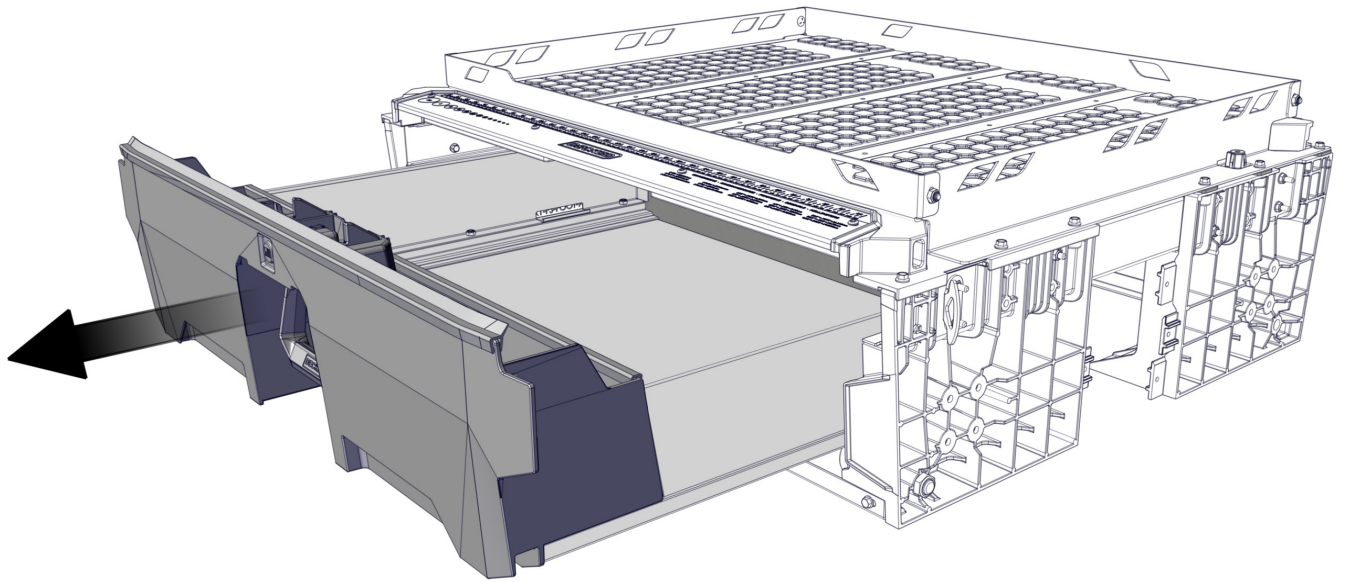

STEP 3:



INSTALL SEAT SIDE

1. Lower the rear seats for installation.
2. Place the two temporary supports (~4" sections of a 2x4 will work great) in each seat side corner of the cargo area. Do not cover the tie down areas with the supports.
3. Carefully lift the base unit up and over the rear door latch and loop and place in the cargo area. It's easiest to have one lifter inside the vehicle. The seat side of the base unit should be propped up on the temporary supports.
4. There are left and right seat side brackets. Loosely install the left seat side bracket (BRACKET D - passenger side) to the base assembly foot as shown. Use the ROUND hole in the foot. DETAIL A. Leave loose for adjustment. Repeat on the driver side using BRACKET C.




NOTE: These screws are being installed directly into the plastic. There will be some resistance at first. Leave loose for now.

5. While the base unit is propped up, replace one factory bolt and washer as shown in DETAIL B. Do not install the other factory bolt and washer; These will be installed later. Repeat on the other side.
6. Remove the temporary supports and carefully place the base unit and brackets down to the cargo floor.

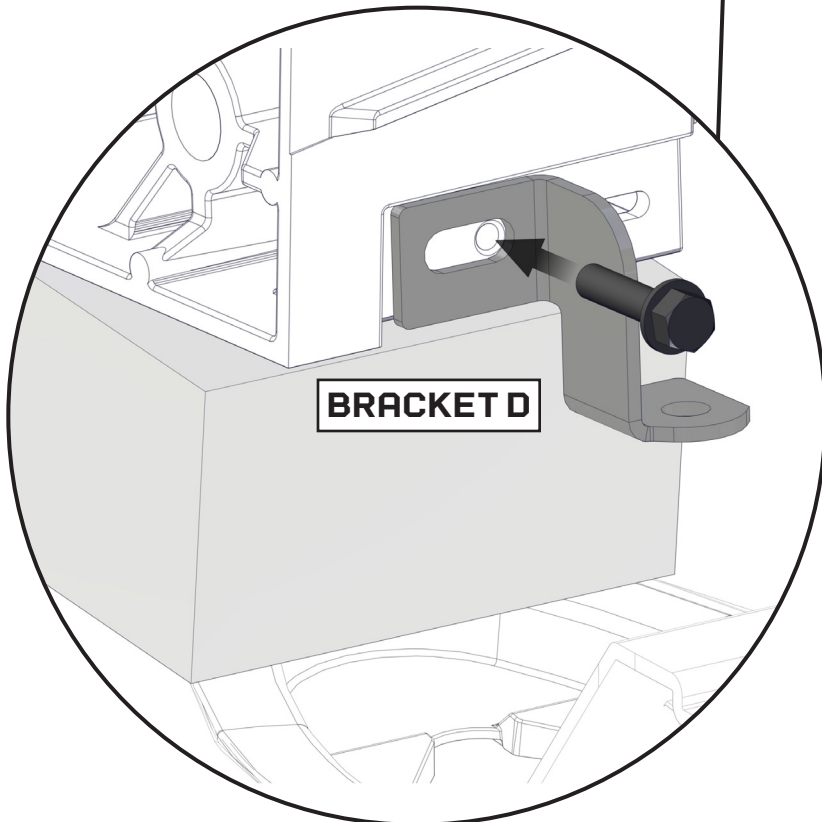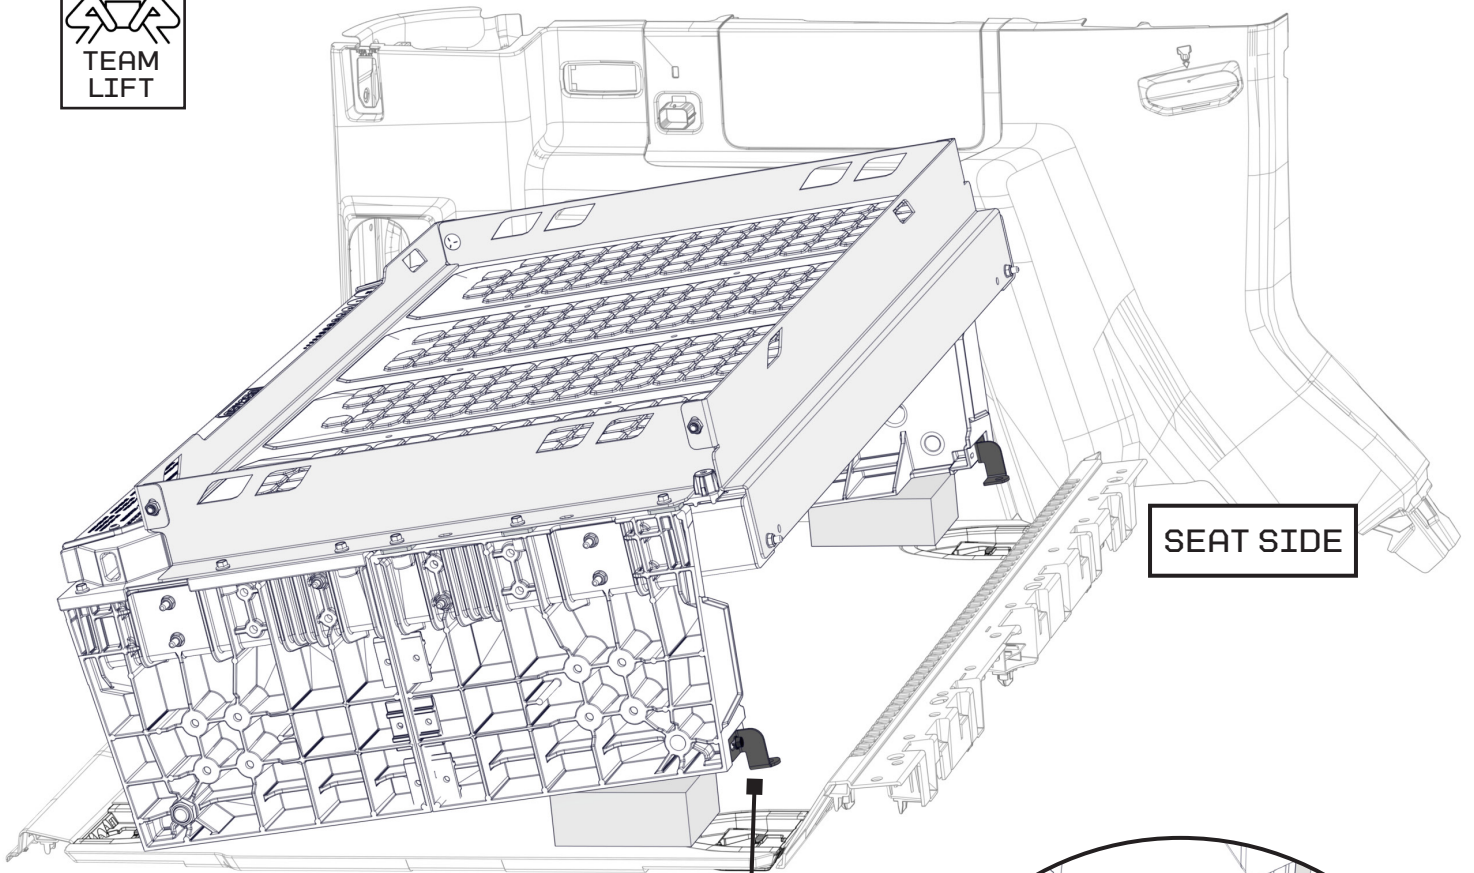

DETAIL A


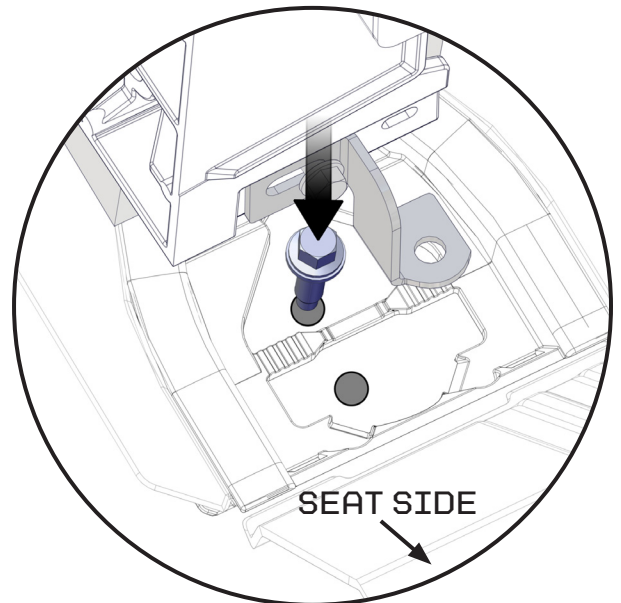


DETAIL B

STEP 4:

BOLTED DOWN



1. Continuing on the seat side of the assembly, align the DECKED brackets to the seat side tie down mounting hole.
2. Replace the factory bolt and washer. Tighten until snug. DETAIL A. Repeat on the other side.
3. Tighten the plastite screws into the foot until snug. Do not overtighten.
4. We installed a shipping brace on the rear-side of the assembly. Remove the two plastite screws holding the brace in place. The brace won't be used again. Save the screws. DETAIL B.

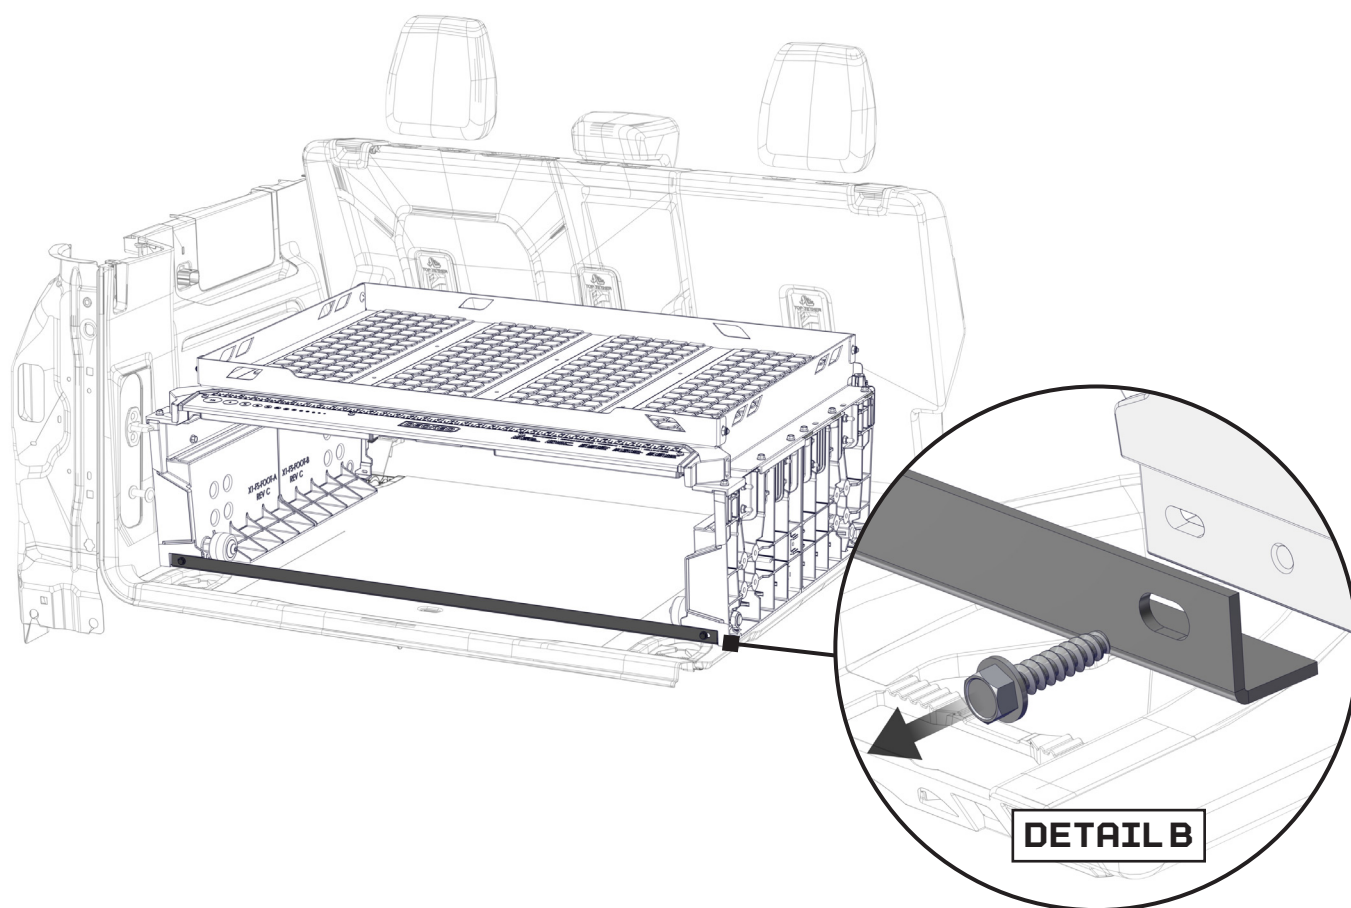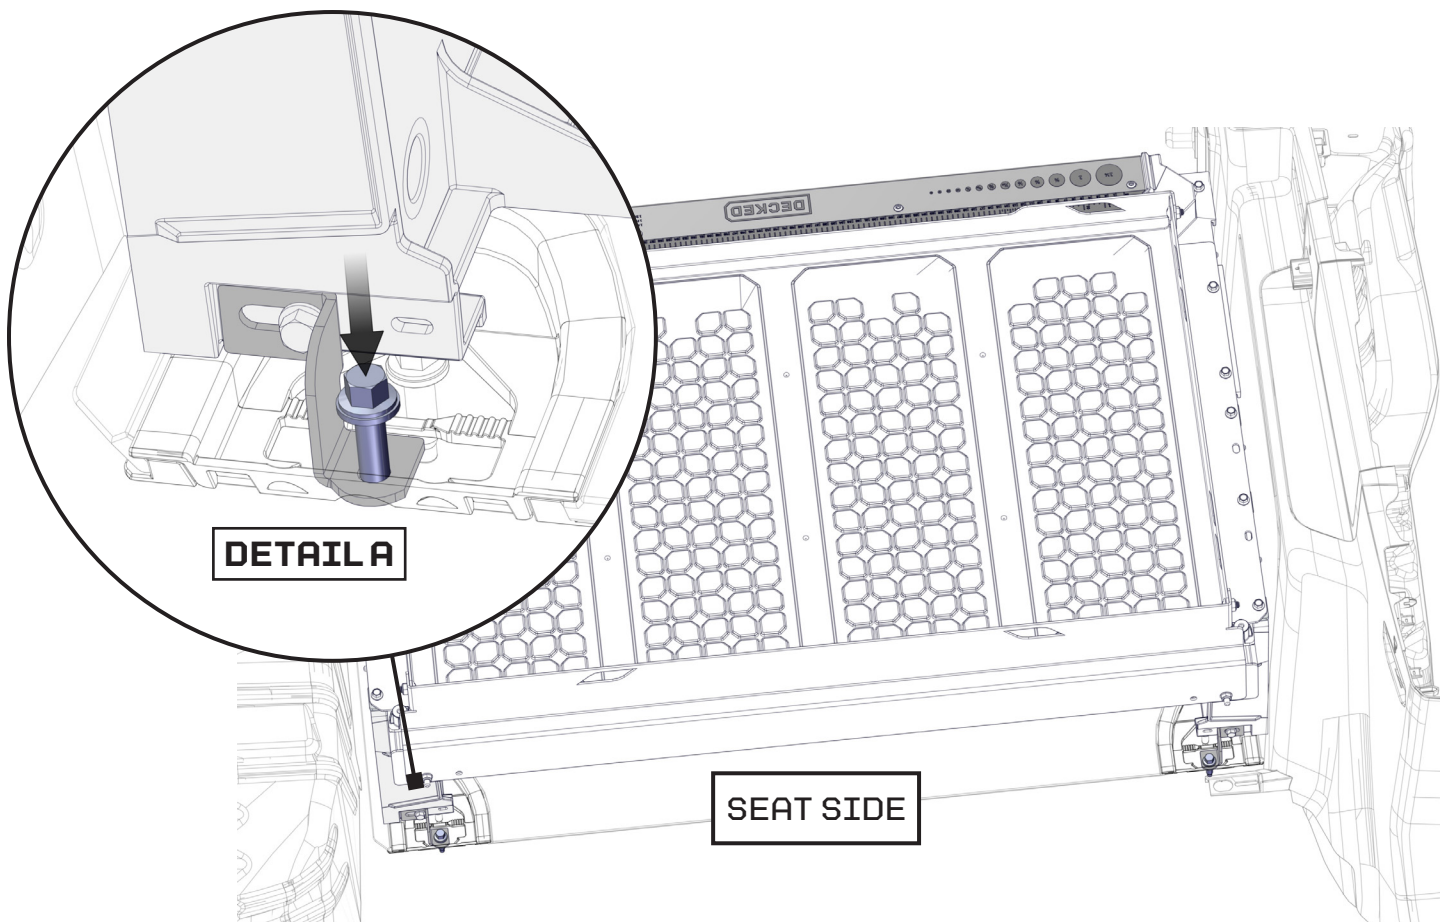

STEP 5:

COMPLETE INSTALL

1. There are left and right rear side DECKED brackets. Use one of the remaining two plastite screws to install BRACKET A on the rear left side left (driver side) using the ROUND holes in the base feet. Leave loose for adjustment.
See #1 in DETAIL A - BRACKET A.
2. Repeat on the right/passenger side with BRACKET B.
3. Align the rear DECKED brackets to the tie down mounting holes.
4. Use the factory tie down bolts and washers to install the bottom of the rear brackets to the cargo floor. Leave all fasteners loose. See #2 in DETAIL A.
5. Align the brackets to the base unit feet and cargo floor.
6. Tighten the cargo floor bolts to a torque rating of 21 lb-ft/28.5 Nm. (#2 DETAIL A)
7. Tighten the plastite screws in the feet until snug. Do not overtighten. (#1 DETAIL A)

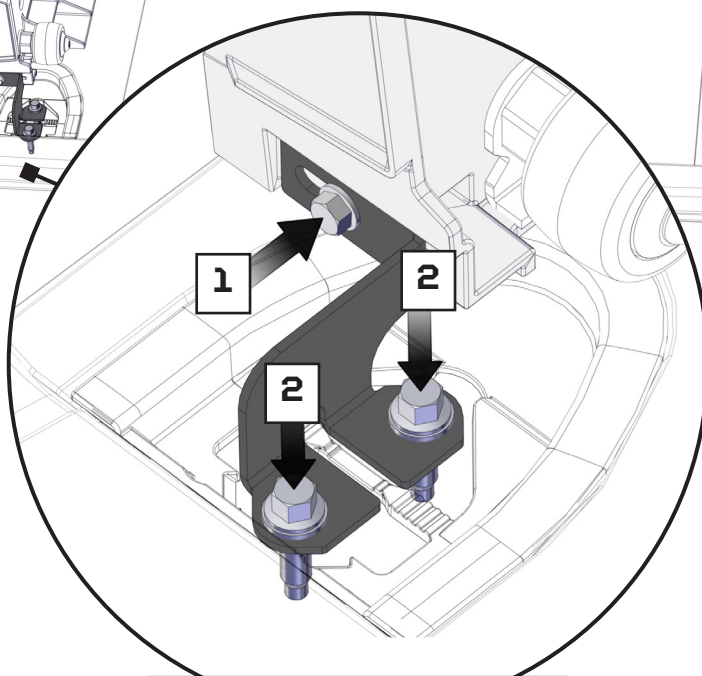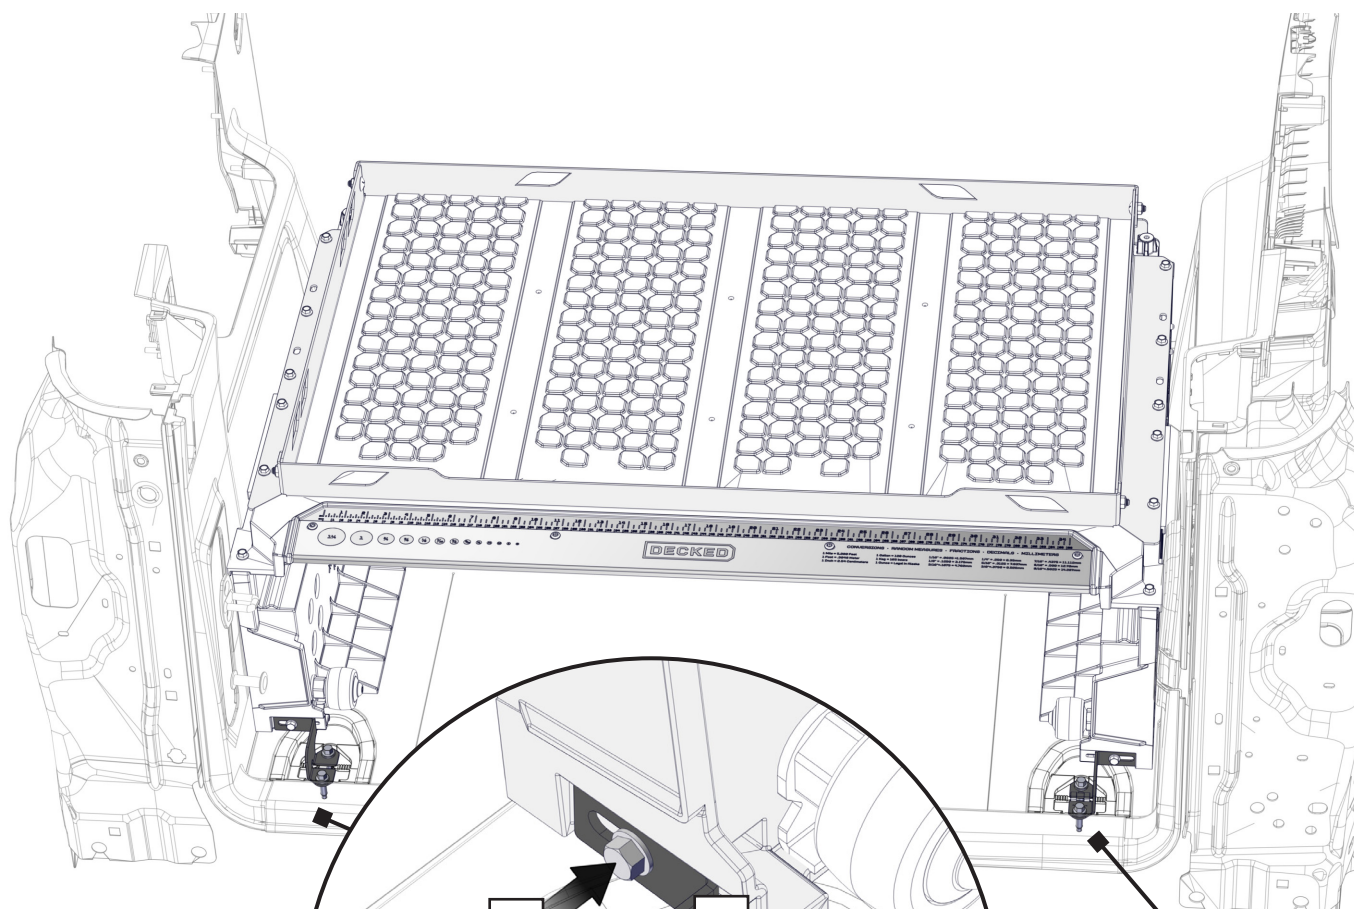


DETAIL A/BRACKET A

**BRACKET B
IS INSTALLED
HERE**

**LEAVE ALL FASTENERS LOOSE
WHILE ALIGNING THE BRACKET,
THEN TIGHTEN.**

STEP 5: GET ROLLING

1. Replace the tray in the same fashion it was removed.
2. Test function. You're done!

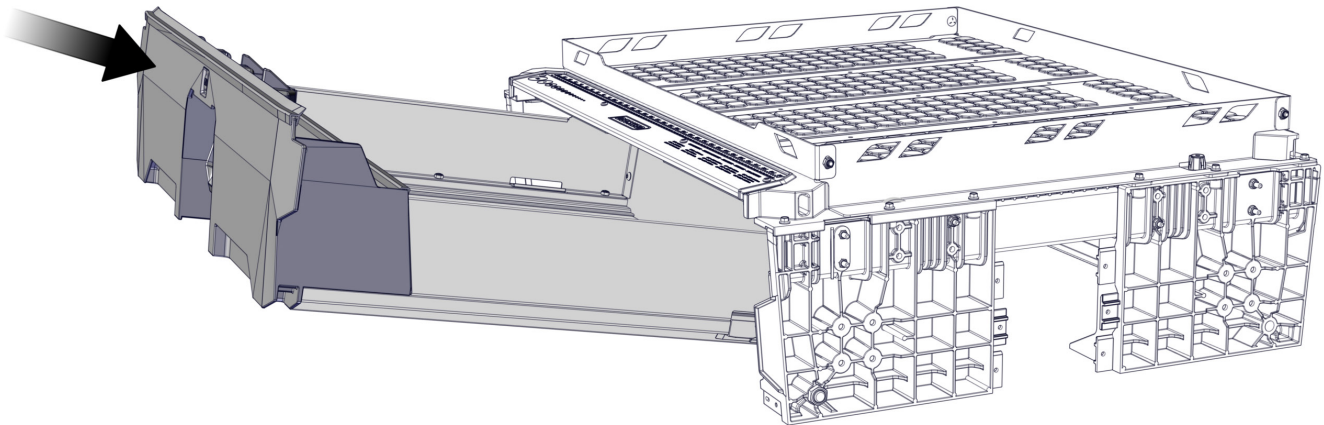



DECKED PRODUCTS LIMITED LIFETIME WARRANTY

(Valid on DECKED Products purchased on or after 8/1/2021)

DECKED LLC, (the "Manufacturer") warrants the original purchaser only that DECKED Truck and Van Products (The "DECKED" Product) will be free from defects in material and workmanship from the date of purchase and continuing for the expected lifetime of the DECKED Product. The DECKED Product must be registered by the original purchaser with DECKED, LLC via its website at, decked.com/register, and a copy of the original sales receipt must be supplied to the Manufacturer at the time a warranty claim is made. This warranty terminates if the original purchaser transfers the DECKED Product to any other person or vehicle.

WHAT IS COVERED

All DECKED Products identified above on or after August 1, 2021. **DECKED's Limited Lifetime Warranty applies to US and Canadian customers only. International shipments are covered by DECKED's 3 Year Limited Warranty.**

WHAT WE WILL DO TO CORRECT PROBLEMS

Subject to the limitations and exclusions described in this limited warranty, the Manufacturer will remedy defects in workmanship or materials by providing one of the following remedies at its option and without charge to the original purchaser for parts: (a) repairing the defective portion of the DECKED Product or (b) replacing the entire DECKED Product. In addition, the Manufacturer may elect at its option not to repair or replace the DECKED Product, but rather issue to the original purchaser a refund equal to the purchase price paid for the DECKED Product or a credit to be used towards the purchase of a new DECKED Product.

WHAT IS NOT COVERED

This limited warranty expressly excludes:

- Damage or defects caused by normal wear and tear, cosmetic rust, scratches, accidents, unlawful vehicle operation, installation in a non-supported vehicle or installed in a vehicle which does not match the DECKED Product's SKU-intended fitment or use, or modification of the product, or any types of repair of a DECKED Product other than those authorized or provided by the Manufacturer.
- Damage or defects resulting from conditions beyond the Manufacturer's control and specifications including, but not limited to modification, misuse, overloading, or failure to assemble, install or use the DECKED Product in accordance with the Manufacturer's written instructions or guidelines included with the DECKED Product or separately made available to the original purchaser.
- Damage to the contents of the DECKED Product or vehicle.
- TO THE EXTENT PERMITTED BY LAW, IN NO EVENT SHALL THE MANUFACTURER BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, INCLUDING ECONOMIC LOSS, WHETHER RESULTING FROM NONPERFORMANCE, USE, MISUSE, OR INABILITY TO USE THE DECKED PRODUCT OR THE MANUFACTURER'S NEGLIGENCE.

NO OTHER EXPRESS WARRANTY APPLIES

This Limited Lifetime Warranty is the sole and exclusive warranty for DECKED Products. No employee, agent, dealer, or other person is authorized to alter this warranty or make any other warranty on behalf of DECKED LLC.


NOTIFICATION PROCEDURES

If the DECKED Product does not conform with the terms of this limited warranty, the original purchaser must promptly notify the Manufacturer in writing upon discovery of the nonconformity. In order to receive remedies under this limited warranty, a warranty claim must have been registered with DECKED LLC by the original purchaser, must describe the nature of the products nonconformity, include a copy of the original sales receipt, invoice, or other proof of purchase and be accompanied with photos or video. Repairs or modifications made to the DECKED Product by other than the Manufacturer or its authorized agent will nullify this limited warranty. Coverage under this limited warranty is conditioned at all times upon the owner's compliance with these required registration, notification, and repair procedures.

Product registration may be performed at:
decked.com/register

Warranty claims must include reciprocal contact information and may be made via certified mail or email to:

DECKED Warranty and Claims
PO Box 885
Ketchum, ID 83340
warranty@decked.com
208-806-0251



**SCAN TO REGISTER
YOUR SYSTEM**

Register your system at
decked.com/warranty

PATENTS

Covered by one or more patents:
www.DECKED.com/pages/patents

For more information on our patents visit: decked.com/patents